




**Introducing Intelix's new line of DVI Cat 5 baluns.**

The Intelix DVI balun allows a high-quality DVI (digital visual interface) signal to be transmitted up to 150 feet over inexpensive Cat 5\* cabling.

**Design with Intelix and Design with Intelligence.**

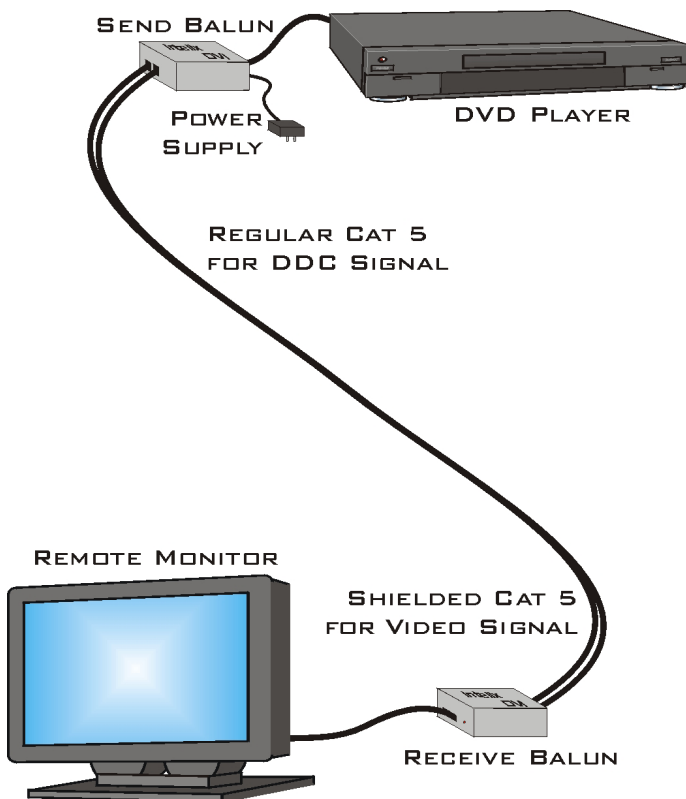

**Features**

- Transmit a DVI signal up to 150 feet over two Cat 5 cables\*
- Eliminates computer noise
- Supports a standard VESA resolution
- Supports a standard HDTV resolution
- Supports the DDWG standard for DVI compliant monitors
- Quick, easy installation
- Small, durable form factor

**Technical Specifications**

<b>Video Amplifier Bandwidth</b>	1.65 GHz
<b>Max Distance</b>	150 feet
<b>Single Link Range</b>	1080P/1920 x 1200
<b>Input Video Signal</b>	1.2 volts p-p
<b>Input DDC Signal</b>	5 volts p-p (TTL)
<b>Input Connectors</b>	(1) Molex 24 pin female DVI connector and (2) RJ45 connectors
<b>Output Connectors</b>	(1) Molex 24 pin female DVI connector and (2) RJ45 connectors
<b>Cabling</b>	Shielded Cat 5 recommended for video; regular Cat 5 for DDC
<b>Power</b>	External 5 VDC
<b>Max Power Consumption</b>	15 watts; powered on send end
<b>Dimensions</b>	3.4" x 3.25" x 1.25"
<b>Temperature</b>	Operating: 32 to 131 degree F Storage: -4 to 185 degree F Humidity: up to 95%
<b>Shipping Weight</b>	3 lbs.
<b>Intelix Part Number</b>	DVI
<b>Ordering Information</b>	DVI package includes both send and receive units, one 5V power supply, one 6' DVI cable
<b>Warranty</b>	2 years

**\*For optimal video quality, shielded Cat 5 is recommended for transmitting the video signal. Shielded Cat 5 is not necessary for transmitting the DDC signal.**